


FSS 000004 R

SSW
4

Analytical Method for Water Vapor Collection and Analysis in Aircraft Cabin Fires

Louise C. Speitel

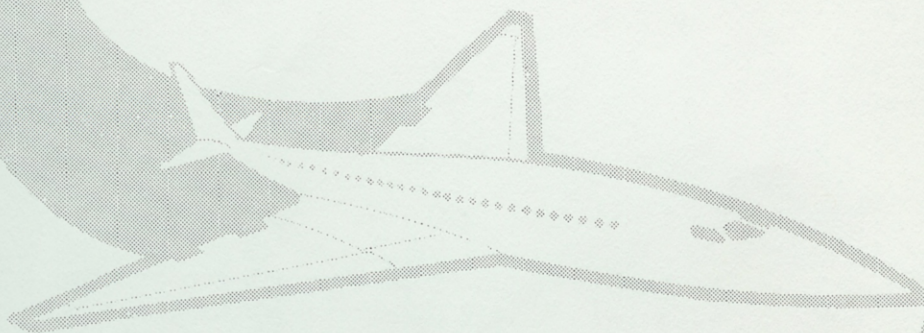

August 1993

DOT/FAA/CT-TN93/33

Document is on file at the Technical Center Library,
Atlantic City International Airport, NJ 08405



U.S. Department of Transportation
Federal Aviation Administration

Technical Center
Atlantic City International Airport, N.J. 08405

NOTICE

This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the objective of this report.

Technical Report Documentation Page

1. Report No. DOT/FAA/CT-TN93/33	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle ANALYTICAL METHOD FOR WATER VAPOR COLLECTION AND ANALYSIS IN AIRCRAFT CABIN FIRES		5. Report Date August 1993	
		6. Performing Organization Code	
7. Author(s) Louise Speitel		8. Performing Organization Report No. DOT/FAA/CT-TN93/33	
9. Performing Organization Name and Address Federal Aviation Administration Technical Center Atlantic City International Airport, NJ 08405		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No.	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Technical Center Atlantic City International Airport, NJ 08405		13. Type of Report and Period Covered Technical Note	
		14. Sponsoring Agency Code ACD-240	
15. Supplementary Notes			
16. Abstract A method of collection and analysis was developed to determine the concentrations of water vapor in full-scale aircraft cabin fire tests as a function of time. Specialized collection tubes were developed which selectively trap water vapor. Particulates are filtered out of the sample stream and light fixed gases such as CO, CO ₂ , O ₂ , methane, propane, and butane pass through the tube. The gas collection sections of the tubes are surrounded by ice-water to maximize collection efficiency of the desiccant packing material. The percentage of water in the test atmosphere is calculated based on the weight gain of the tube and the volume of sample drawn. The flow is controlled by a calibrated needle valve, downstream of the sampling assembly, held at a constant temperature. The method was validated by analyzing selected components of a sample tube from a full-scale fire test by Thermogravimetric Analysis.			
17. Key Words Water Vapor Water Spray Aircraft Cabin Fire Tests Combustion, Analysis, Water Vapor Analysis		18. Distribution Statement Document is on file at the Technical Center Library, Atlantic City International Airport, New Jersey 08405	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 20	22. Price

TABLE OF CONTENTS

	Page
EXECUTIVE SUMMARY	v
INTRODUCTION	1
Purpose	1
Background	1
DISCUSSION	1
Collection	1
Analysis	2
Method Validation	3
Calculations	5
Evaluation of Test Results	6
SUMMARY	7
REFERENCES	7

LIST OF ILLUSTRATIONS

Figure		Page
1	Water Vapor Collection Tube Mounted Through Ice-Water Bath	8
2	Housing for Water Vapor Collection Tubes	9
3	Sampling System Diagram	10
4	Thermogravimetric Analysis of Teflon FEP	11
5	Thermogravimetric Analysis of Drierite Pellets	12
6	Thermogravimetric Analysis of Drierite Pellets	13
7	Comparative Water Vapor Concentrations for Wide-Body Aircraft Cabin Water Spray Tests at Station 80, 5 feet 6 inches	14
8	Comparative Water Vapor Concentrations for Wide-Body Aircraft Cabin Water Spray Tests at Station 580, 3 feet 6 inches	15
9	Comparative Water Vapor Concentrations as a function of Temperature for Wide-Body Aircraft Cabin Water Spray Tests at Station 80, 5 feet 6 inches	16
10	Comparative Water Vapor Concentrations as a Function of Temperature for Wide-Body Aircraft Cabin Water Spray Tests at Station 580, 3 feet 6 inches	17

EXECUTIVE SUMMARY

This report describes the method of collection and analysis developed to measure water vapor as a function of time for full-scale aircraft cabin fire tests.

Specialized collection tubes were developed which selectively trap water vapor. Particulates are filtered out of the sample stream and light fixed gases such as CO, CO₂, O₂, methane, propane, and butane pass through the tube. The gas collection sections of the tubes are surrounded by ice-water to maximize collection efficiency of the desiccant packing material. The tubes are weighed before and after a test. The percentage of water in the test atmosphere is calculated based on the weight gain of the tube and the volume of sample drawn. The flow is controlled by a calibrated needle valve, downstream of the sampling assembly, held at a constant temperature. The method was validated by analyzing selected components of a sample tube from a full-scale fire test by Thermogravimetric Analysis.

This procedure was used to evaluate the differences in water vapor released during a series of full-scale TC-10 cabin fire tests with and without aircraft cabin water spray fire suppression.

INTRODUCTION

PURPOSE.

The purpose of this work is to develop a method of quantifying water vapor in the presence of a complex mixture of airborne combustion products, to verify that this method is relatively free of interferences, and to demonstrate the applicability of this method to measure water vapor as a function-of-time in an aircraft cabin fire with and without water spray.

This data was used to access whether there is an additional thermal inhalation hazard from the water vapor generated by water mist suppression of aircraft cabin fires.

BACKGROUND.

Concentrations of water vapor were expected to be very high for a baseline aircraft cabin fire test. Water is a product of combustion for many materials. Using methane as an example, for every mole of CO_2 produced by the combustion of methane, 2 moles of water are produced. Concentrations of 10 percent of CO_2 are often seen for full scale fire tests. Corresponding concentrations of 20 percent water would be expected if methane were the fuel.

Cabin water spray systems may result in vaporization of high volumes of water. A gravimetric procedure for measuring these high water vapor levels was selected over more elaborate instrumental methods. It would avoid the need for heated filters and sample lines, would be self-calibrating and could be quickly assembled from readily available materials. The ice-water bath housing is the same used for past acid gas sampling in the TC-10 (reference 1).

DISCUSSION

COLLECTION.

Specialized collection tubes were developed to collect water samples in the TC10 fire tests. The tube is constructed of Teflon FEP, is transparent, and is 10 1/2 inches long with a 1/4-inch outside diameter (o.d.) and 4.8 millimeter (mm) inside diameter (i.d.). It is packed with 10 to 20 mesh indicating drierite, anhydrous calcium sulfate, for a 3 1/4-inch length on the downstream end of the tube, as indicated in figure 1. Teflon retainers and glass wool hold the drierite in place. Further upstream within the tube are seven 3 mm diameter solid glass beads which serve to cool down the hot gas stream. A glass wool filter is located within the upstream end of the tube to trap particulates. Teflon retainers hold the glass wool and beads in position.

The tubes are mounted horizontally through an ice-water bath perpendicular to the expected smoke velocity vector. This housing is illustrated in figure 2. The container is an aluminum box insulated with 1/2 inch KAOWOOL™ board insulation. There are 12 tubes mounted through the front face of the box. Ten are sample tubes and 2 serve as controls. The tubes are held in place with drilled through Swagelock bulkhead fittings, such that each tube slips through the fitting, and extends 3 1/4 inches outside the metal box. Water-tight vespel ferrules replace the standard Swagelock ferrules. The interior ends of the 10 sample tubes are attached to separate 1/4-inch o.d. copper vacuum lines which pass through the bottom of the box, through the aluminum skin of the fuselage to the solenoid valve assembly (figure 3). The interior ends of the 2 control tubes are capped. One half-inch i.d. braided fiberglass tubing protects the exposed section of the collection tube, external to the box. This prevents the external section of each tube from softening and sagging at the higher temperatures (i.e., temperatures greater than 350 °F). The internal filter in each tube is positioned within the tube far enough from the ice bath to prevent condensation of water in the filter.

The box has a drain line for the removal of ice-water after a test. The front of the box is jacked up 1 inch, so that water condensing within each tube does not exit the tube or wet the internal filter.

The solenoid valve assembly is an array of 10 solenoid valves, remotely controlled by the data acquisition/control computer so that a sample is drawn for 30 seconds for each sample tube during the 5-minute test period. Downstream of this assembly, one 1/4 inch vacuum line is followed by a particulate filter, which is followed by a Matheson 603 Flowmeter with a restrictor valve which sets the flow. This is followed by house vacuum. This flowmeter is set to draw at 68 glass for each test. Since this flowmeter is external to the fuselage, 30 feet downstream of the point of exiting the fuselage, the sample stream of dried gas flowing through it during a fire test approaches room temperature. The tubes are sealed with plastic caps and placed in a drierite desiccator prior to weighing. The respective flows are measured posttest upstream of the same sample tubes, after the tube filters are removed and the tubes are weighed, to check the flow uniformity from tube to tube.

Two of these sampling assemblies are used in the TC10 water spray tests. One at station 80 at 5 feet 6 inches and one at station 580 at 3 feet 6 inches.

ANALYSIS.

The 12 collection tubes for each sampling station are weighed before and after the test with the internal filter and first upstream retainer removed. The corresponding filters are also weighed before and after each test. The tube weight gain is assumed to be predominantly due to the collection of water vapor. Carbon monoxide, carbon dioxide, oxygen, and other fixed gases with low boiling points pass through the tube with no retention. Water condenses and/or reacts with the drierite to form waters of hydration ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$).

A Mettler P163 pan balance with a tara adjustment was used, with a readability of 1 mg. A hollow conical (i.d.₁ = 1/4 in., i.d.₂ = 3 1/4 in., height = 2 1/2 in.) polypropylene sample tube holder was employed to hold the sample tube upright while weighing. The balance calibration was frequently checked using appropriate class P-metric standard weights.

METHOD VALIDATION.

The Teflon FEP tubing was subject to Thermogravimetric Analysis (TGA) heated in zero grade air from 40 °C to 800 °C to determine if the high temperatures generated in the fire tests would cause weight loss of the sample tubes (figure 4). TGA measures weight loss as a function of temperature. It can be seen that the teflon starts to decompose at 350 °C (662 °F). At 500 °C the sample loses 1 percent of its weight. At 720 °C, it loses 100 percent of its weight.

The temperature did not approach 350 °C in the sampling locations in the wide-body fire tests discussed in this report. Temperatures remained below 218 °C (424 °F). Likewise, no significant weight loss was observed for any of the control water vapor collection tubes, indicating that weight loss of the absorption tube itself is not an error in these tests.

The potential error of soot, oil, and acid gases collected in the water vapor collection tubes was minimized by placing a light glass wool filter in the intake end of each tube. This filter was removed before weighing each tube. The weight gain of these filters was low relative to the weight gain of the collection tubes. The greatest filter weight gain was 4 mg. The filters visually appeared to be very effective in trapping the dry black powdery soot, leaving very little discoloration of the downstream parts of the tube.

The weight change of the filters in the control tubes never exceeded 1 mg, indicating that the deposition of soot in the tubes exposed to a 5-minute fire test is not a significant error.

The eighth sample tube from station 80, 5 feet 6 inches, was subjected to Thermogravimetric Analysis from 40 °C to 900 °C at a heating rate of 20 °C per minute, for the baseline TC10 test with no water spray, to determine collection efficiency and any weight loss of compounds other than water. The maximum temperature reached during this 30-second sampling period for this tube was 184 °C (364 °F). The following samples were analyzed:

- (1) An intact drierite pellet (pink) on the upstream end of the tube
- (2) An intact drierite pellet (blue) on the downstream end of the tube
- (3) An intact drierite pellet (blue) from the reagent bottle
- (4) An intact drierite pellet (pink) in ambient room air at 75 °F for 3 hours
- (5) The intact glass wool plug upstream of the drierite
- (6) The intact glass wool plug downstream of the drierite

Figure 5 presents TGA plots of weight loss as a function of temperature for the drierite pellets 1, 2, and 3 heated in dry zero air. The pellets were exposed to room air briefly, while transferring them to the balance pan of the TGA, which most likely resulted in some absorption of moisture. The weight increase for these pellets during the early part of the analysis is due to absorption of moisture from the ambient air which enters the furnace chamber as the sample is loaded. It can be seen from figure 5 that the collection efficiency of this collection tube is excellent, as the downstream pellet has a low and similar water content to the the pellet taken directly from the reagent bottle. The upstream drierite pellet 1, has a considerably greater water content than the downstream pellet.

Figure 6 presents TGA plots of drierite pellets 3 and 4 heated in dry zero air. Drierite becomes anhydrous by 180 °C (356 °F). The curves match fairly closely up to this temperature, indicating that the TGA weight loss up to 180 °C appears to be due primarily to water.

TGA analysis of the glass wool plugs 5 and 6 indicates that the upstream plug had a weight gain of 0.02 mg. However 55 mg of water was collected in this tube. Thus the weight gain of the tube due to higher boiling point molecules seems to be an insignificant error.

Six sample collection tubes from the same baseline test were heated in a drying oven at 180 °C (356 °F). They were placed in a desiccator lined with indicating drierite to cool prior to weighing. This procedure was repeated until a constant weight was measured. A tube weight loss exceeding its weight gain for the tubes with negligible weight gain, indicates that the tube was not 100 percent anhydrous prior to the test. It appears that the pre-test water content of the tubes ranged from 0 to 6 mg.

Tube No.	Station	Tube Weight before Test (g)	Tube Weight after Test (g)	Tube Weight after Drying (g)	Tube Weight Gain (g)	Tube Weight Loss (g)	Gain minus Loss (g)
9	80, 5'6"	10.804	10.881	10.806	.077	.075	+.002
9	580,3'6"	10.963	11.022	10.963	.059	.059	.000
7	80, 5'6"	10.987	11.022	10.982	.035	.040	-.005
7	580,3'6"	10.576	10.622	10.577	.046	.045	+.001
2	580,3'6"	10.716	10.718	10.710	.002	.008	-.006
B2	580,3'6"	10.639	10.641	10.639	.002	.002	.000

Since the tubes return to their original weight or less after heating at 356 °F, little to none of the material collected in the tube had a boiling point exceeding this temperature or was irreversibly bound to the tube packing material at this temperature.

CALCULATIONS.

The flow upstream of the tubes was measured with a Matheson 603 flowmeter. The flow measured was 1.01 liters/minute at 760 mm Hg and 70 °F (21.1 °C). Assuming this room temperature air was dry, 1.01 liters per minute of dry air was drawn through the restricting needle valve of the downstream flowmeter.

During a test, the mass flow into the tube exceeds the mass flow downstream of the tube by the mass of water collected. Since the flow is metered downstream, a flow correction is needed to account for the additional volume of water sampled.

KNOWN:

Volume of 1 mole of ideal gas at 70 °F, 1 atm. = 24.2 liters

$$\text{ie) } 70 \text{ }^{\circ}\text{F} = 21.1 \text{ }^{\circ}\text{C} + 273.2 \text{ K} = 294.3 \text{ K} \quad (1)$$

$$\text{and } V = \frac{nRT}{P} \text{ where } R = 8.2057 \times 10^{-2} \text{ l atm mol}^{-1}\text{deg}^{-1}$$

$$V = 1(8.2057 \times 10^{-2})(294.3)$$

$$V = 24.2 \text{ liters}$$

The Molecular weight of water = 18.01g mol⁻¹

$$MW_{H_2O} = 2(1.008) + 15.994 \quad (2)$$

$$MW_{H_2O} = 18.01 \text{ g mol}^{-1}$$

IF:

100% pure water vapor at 1 atm., 70 °F is drawn INTO the tube at an actual flow rate of 1.01 l min⁻¹ with no other gas present (note: this is nonsense but assume the water is entirely in the vapor phase), and water vapor behaves as an ideal gas,

THEN:

0.505 liters is drawn INTO the tube in 30 seconds

AND:

$$\begin{aligned} \text{Mass water collected} &= \frac{1 \text{ mole}}{24.2 \text{ l}} \left(\frac{18.01 \text{ g H}_2\text{O}}{\text{mole}} \right) \left(\frac{.505 \text{ l}}{\text{tube}} \right) \quad (3) \\ &= 0.376 \text{ g} \end{aligned}$$

Therefore 0.376g = mass of water vapor sampled at 70 °F, 1 atm per tube if P_{ATM} = P_{H₂O}, and actual flow into tube = 1.01 l min⁻¹